



SSCE24V12N9

SSCE24V12N9

Low-Capacitance Bidirectional Micro Packaged TVS Diodes for ESD Protection

The SSCE24V12N9 is 24V bi-direction TVS technology to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium.


The SSCE24V12N9 has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD(electrostatic discharge), and EFT (electrical fast transients).

Features

- Peak Power Dissipation –300 W (8 x 20 us Waveform)
- Stand-off Voltage: 24 V
- Low capacitance (<18.0pF) for high-speed interfaces
- Replacement for MLV (0402)
- Protects I/O Port
- Low Clamping Voltage
- Low Leakage
- Low Capacitance
- Response Time is < 1 ns
- Meets MSL 1 Requirements
- ROHS compliant
- Solid-state Punch-Through TVS Process technology
- AF technology



DFN1006

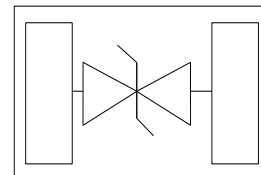

Main applications

- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals
- MP3 Players

Ordering Information

Device	Qty per Reel	Reel Size
SSCE24V12N9	10000	7 Inch

Protection solution to meet

- IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- IEC61000-4-5 (Lightning) 6A (8/20 μs)



SSCE24V12N9

Maximum ratings (Tamb=25°C Unless Otherwise Specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20μs waveform)	PPPP	300	Watts
ESD Rating per IEC61000-4-2:	Contact	30	KV
	Air	30	
Lead Soldering Temperature	TL	260 (10 sec.)	°C
Operating Temperature Range	TJ	-55 ~ 150	°C
Storage Temperature Range	TSTG	-55 ~ 150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


*Other voltages may be available upon request.

1. Non-repetitive current pulse, per Figure 1.

Electrical characteristics (Tamb=25°C Unless Otherwise Specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V _{RWM}	Reverse Working Voltage				24	V
V _{BR}	Reverse Breakdown Voltage	I _T = 1mA,	26.7			V
I _R	Reverse Leakage Current	V _{RWM} = 24V,		0.1		μA
V _C	Clamping Voltage	I _{PP} = 6A, tp = 8/20μs,		56		V
C _J	Junction Capacitance	V _R = 0V, f = 1MHz,		16	18	pF


Symbol	Parameter
V _{RWM}	Working Peak Reverse Voltage
V _{BR}	Breakdown Voltage @ I _T
V _C	Clamping Voltage @ I _{PP}
I _T	Test Current
I _{RM}	Leakage current at V _{RWM}
I _{PP}	Peak pulse current
C _O	Off-state Capacitance
C _J	Junction Capacitance

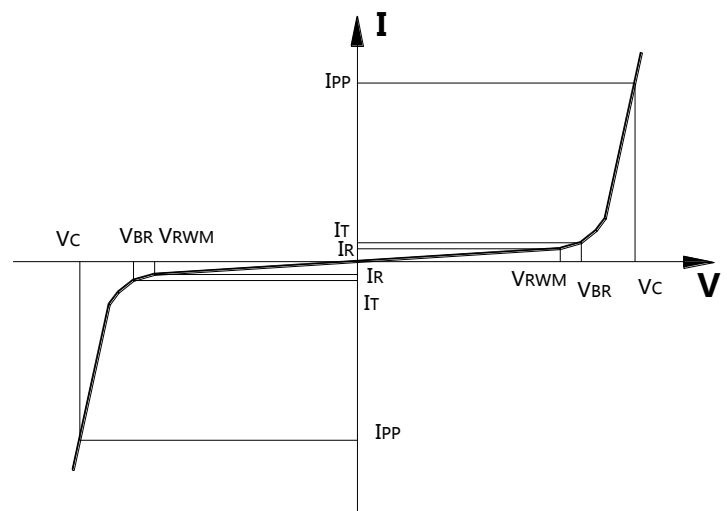




SSCE24V12N9


Typical electrical characterist applications

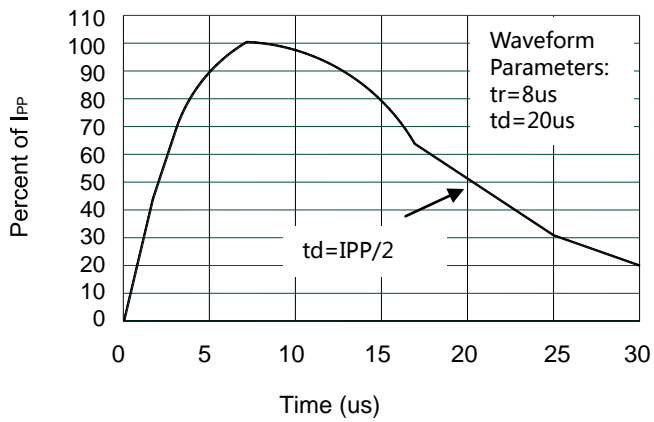

Pulse Waveform

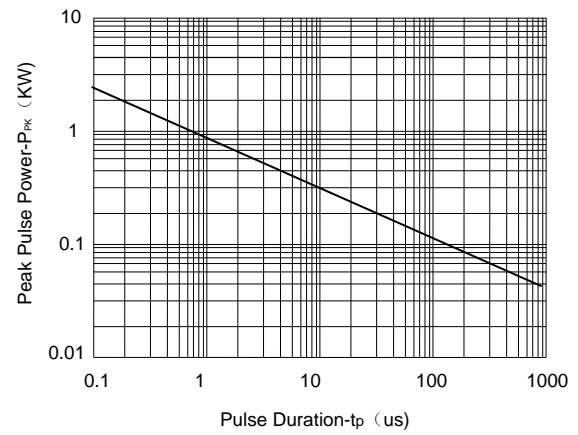

Non-Repetitive Peak Pulse Power vs. Pulse Time

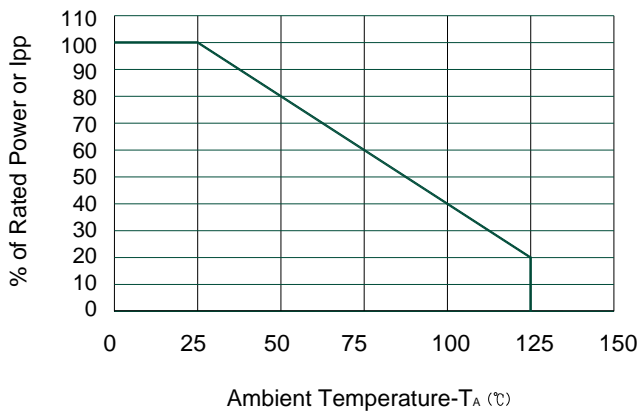

Power Derating Curve



SSCE24V12N9


Package Information

DFN-1006

Mechanical Data


Case:DFN1006

Case Material: Molded Plastic. UL Flammability

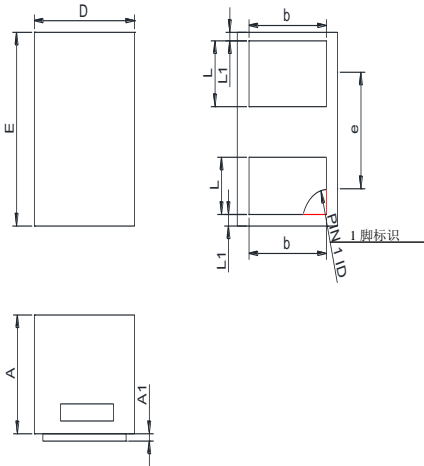

DIM	Millimeters	
	Min	Max
A	0.35	0.50
A1	0.00	0.05
D	0.45	0.55
E	0.95	1.05
b	0.45	0.55
e	0.65TYP	
L	0.2	0.3
L1	0.05REF	

Recommended Pad outline

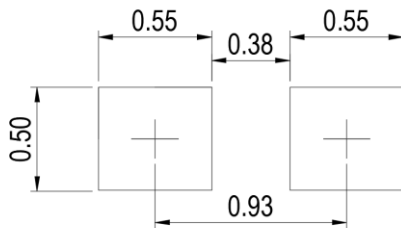



SSCE24V12N9

DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.