



# SSCE5V021D3

## SSCE5V021D3

Ultra-low Capacitance Unidirectional Micro Packaged TVS Diodes for ESD Protection

### ● Description


The SSCE5V021D3 is designed to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium.

It has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), and EFT (electrical fast transients).

### ● Feature

- ✧ 50W peak pulse power ( $t_P = 8/20\mu s$ )
- ✧ SOD-523 Package
- ✧ Working voltage: 5V
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ RoHS compliant transient protection for high speed data lines to IEC61000-4-2(ESD)  $\pm 15kV$ (air),  $\pm 8kV$ (contact)

### ● PIN configuration

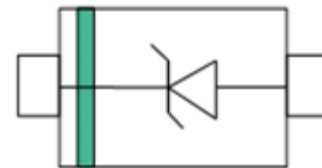

Topview

### ● Applications

- ✧ USB 1.0/2.0/3.0/3.1, VGA, DVI, SDI
- ✧ DVI & HDMI Port Protection
- ✧ Serial and Parallel Ports
- ✧ Mobile Handsets
- ✧ Notebooks, Desktops, Servers
- ✧ High Speed Line
- ✧ Portable instrumentation


### ● Mechanical data

- ✧ Lead finish: 100% matte Sn(Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 1 requirements
- ✧ Pure tin plating: 7 ~ 17  $\mu m$
- ✧ Pin flatness:  $\leq 3mil$



● **Electronic Parameter**

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$P_{PP}$	Peak Pulse Power
$C$	Junction Capacitance

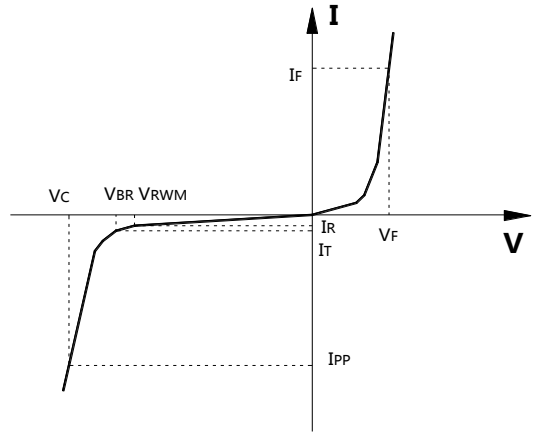

● **Absolute maximum rating @TA=25°C**

Symbol	Parameter	Value	Units
$P_{PP}$	Peak Pulse Power (8/20μS)	50	W
$T_{STG}$	Storage Temperature	-55/+150	°C
$T_J$	Operating Temperature	-55/+150	°C

● **Electrical Characteristics @TA=25°C**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	$V_{RWM}$			5		V
Breakdown Voltage	$V_{BR}$	$I_t = 1\text{mA}$		6		V
Reverse Leakage Current	$I_R$	$V_{RWM} = 5.0\text{V}, T = 25^\circ\text{C}$		2		μA
Clamping Voltage	$V_C$	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$		12		V
Junction Capacitance	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$		0.5	1	pF



# SSCE5V021D3

## ● Typical Performance Characteristics

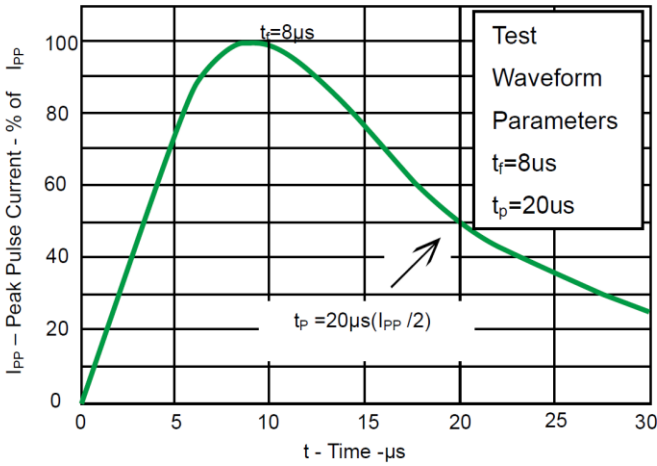


Fig 1. Pulse Waveform


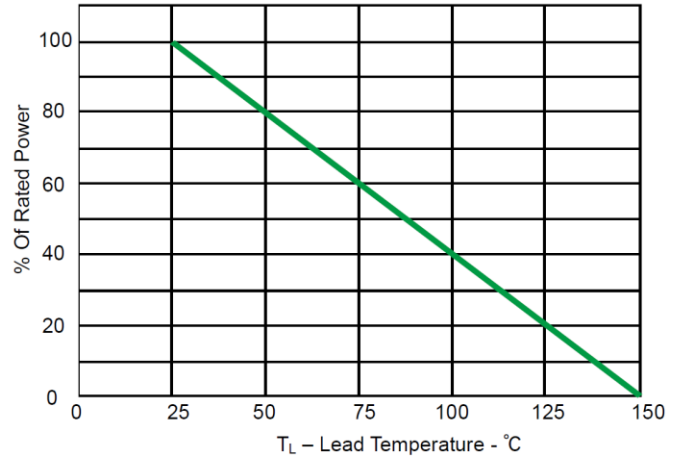


Fig 2. Power Derating Curve




### Non-Repetitive Peak Pulse Power vs. Pulse Time

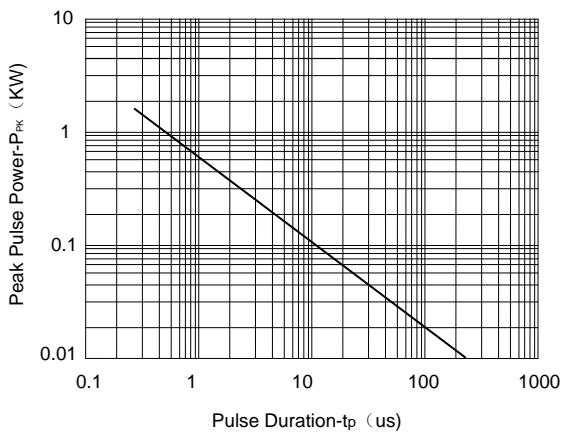

# SSCE5V021D3

- **Solder Reflow Recommendation**

Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

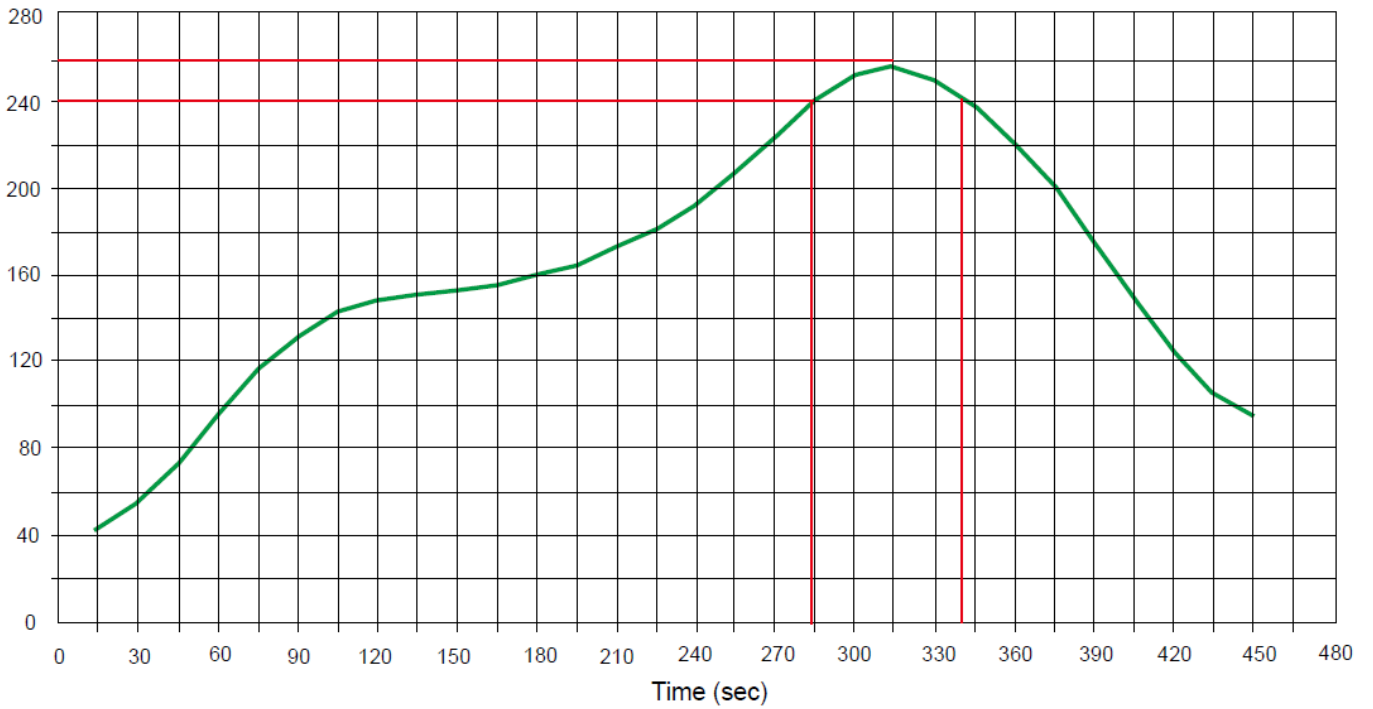



# SSCE5V021D3

## ● Package Information


### Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V021D3	SOD-523	3000	7 Inch

### Mechanical Data


Case: SOD-523

Case Material: Molded Plastic. UL Flammability

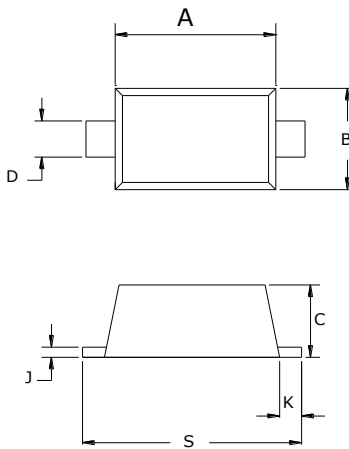

Dim	Millimeters	
	Min	Max
A	1.10	1.30
B	0.75	0.85
C	0.51	0.70
D	0.25	0.35
J	0.08	0.15
K	0.15	0.25
S	1.50	1.70

### Recommended Pad outline

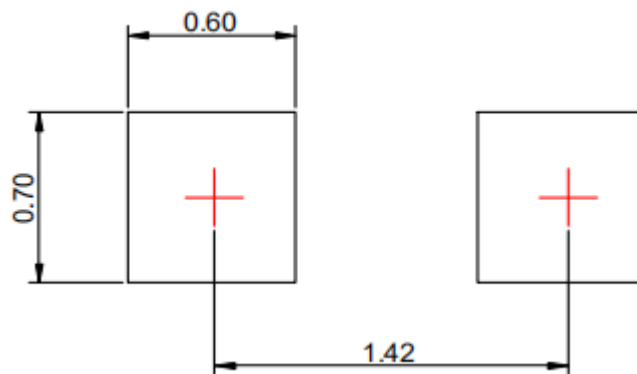



## DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE ) AND THEREFORE OUTSIDE THE WARRANTED RANGE.