



SSCE3V322L1

1-line Bidirectional Micro Packaged TVS Diodes for ESD Protection

● Description


The SSCE3V322L1 is a bi-directional TVS diode. It is designed with AF process TVS technology to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium.

It has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), and EFT (electrical fast transients).


● Feature

- ✧ 80W peak pulse power ($t_p = 8/20\mu s$)
- ✧ DFN0603-2L Package
- ✧ Working voltage: 3.3V
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ Low leakage current
- ✧ RoHS compliant transient protection for high speed data lines to IEC61000-4-2 (ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)

● PIN configuration



Top view



Marking

● Applications

- ✧ Cellular handsets
- ✧ Computers and peripherals
- ✧ Microprocessors
- ✧ Power lines
- ✧ Portable Electronics
- ✧ Notebooks


● Mechanical data

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 1 requirements
- ✧ Pure tin plating: 7 ~ 17 μm
- ✧ Pin flatness: $\leq 3mil$



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

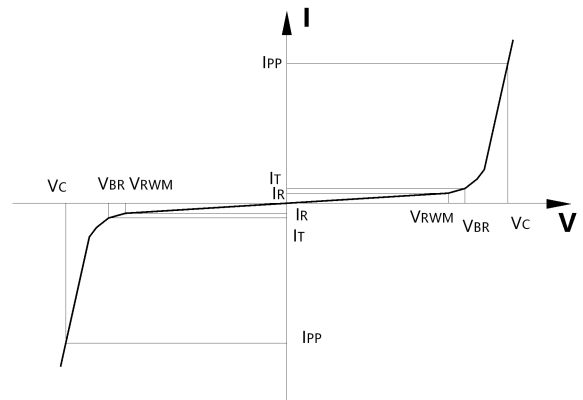

● Absolute maximum rating @ $T_A=25^{\circ}C$


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μ s)	P_{PP}	80	W
Peak Pulse Current (8/20 μ s)	I_{PP}	8	A
ESD Rating per IEC61000-4-2:	Contact Air	V_{ESD}	30
			30
Storage Temperature	T_{STG}	-55/+150	$^{\circ}C$
Operating Temperature	T_J	-55/+125	$^{\circ}C$

● Electrical Characteristics @ $T_A=25^{\circ}C$


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Working Voltage	V_{RWM}				3.3	V
Breakdown Voltage	V_{BR}	$I_T = 1mA$	3.8			V
Reverse Leakage Current	I_R	$V_{RWM} = 3.3V$			0.2	μA
Clamping Voltage	V_C	$I_{PP} = 1A, t_p = 8/20\mu s$		6		V
Clamping Voltage	V_C	$I_{PP} = 8A, t_p = 8/20\mu s$		8	10	V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz$		13	20	pF




● **Typical Performance Characteristics**

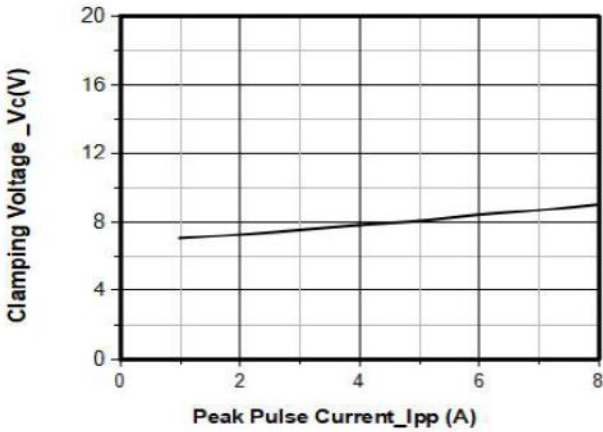


Junction Capacitance vs. Reverse Voltage

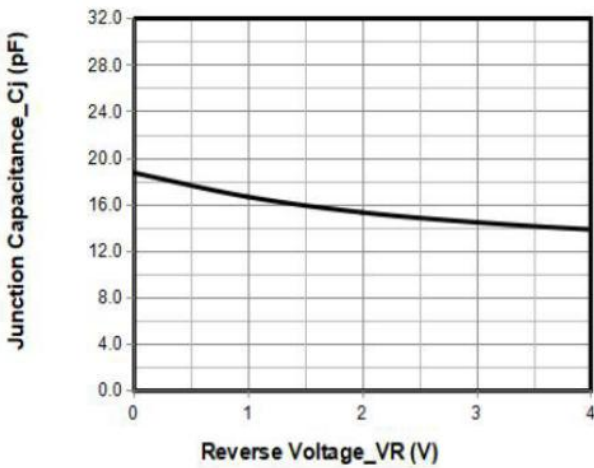


Clamping Voltage vs. Peak Pulse Current

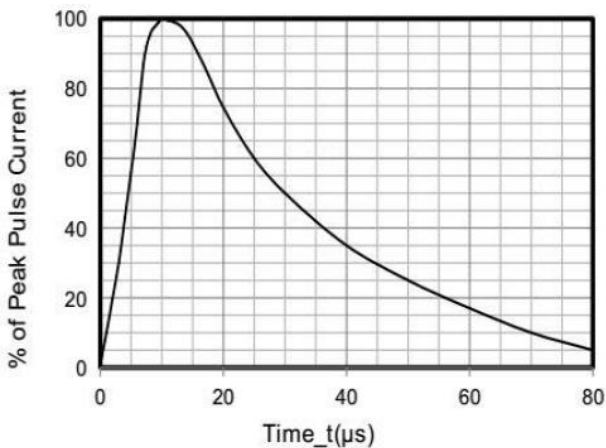


8 X 20μs Pulse Waveform

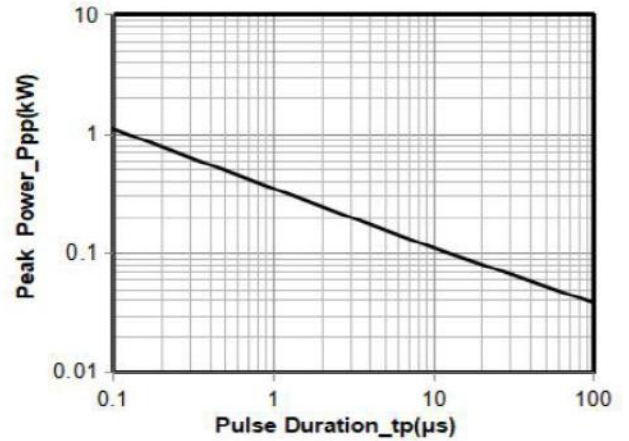

Peak Pulse Power vs. Pulse Time

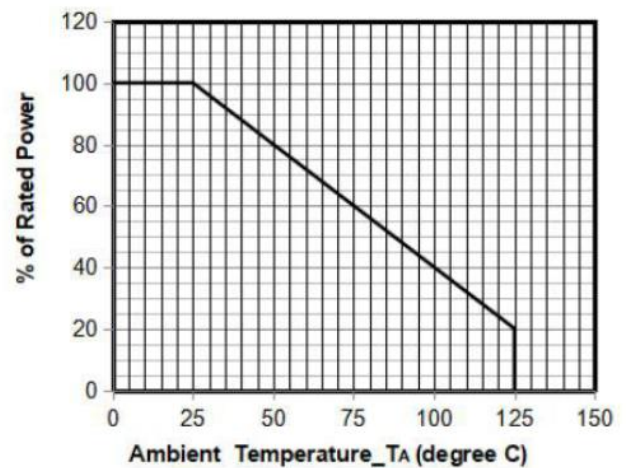

Power Derating Curve

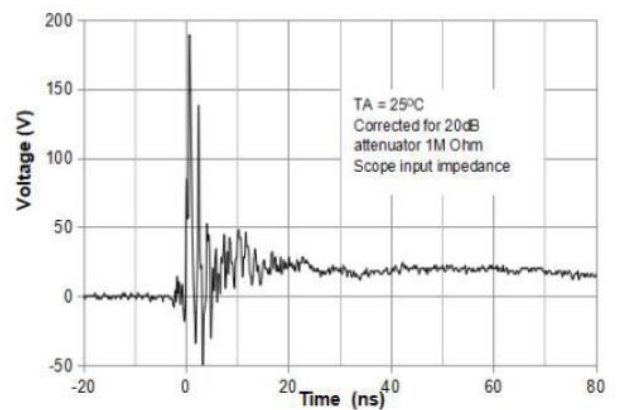

ESD Clamping Voltage

8 kV Contact per IEC61000-4-2



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE3V322L1	DFN0603-2L	15000	7 Inch

Mechanical Data


Case:DFN0603-2L

Case Material: Molded Plastic. UL Flammability

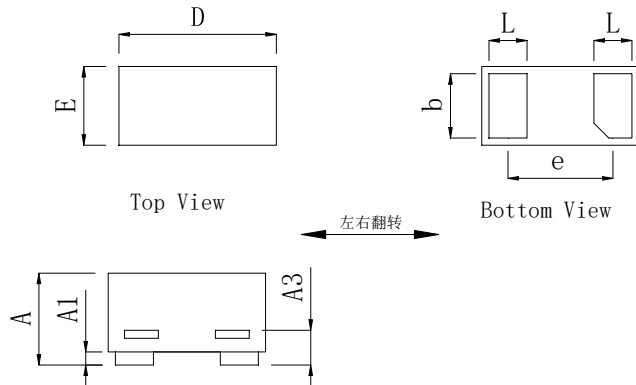


DIM	Millimeters	
	Min	Max
A	0.230	0.330
A1	0.000	0.050
A3	0.102REF	
D	0.550	0.650
E	0.250	0.350
b	0.210	0.275
L	0.120	0.175
e	0.40BSC	

Recommended Pad outline



DFN0603 Reel Dim

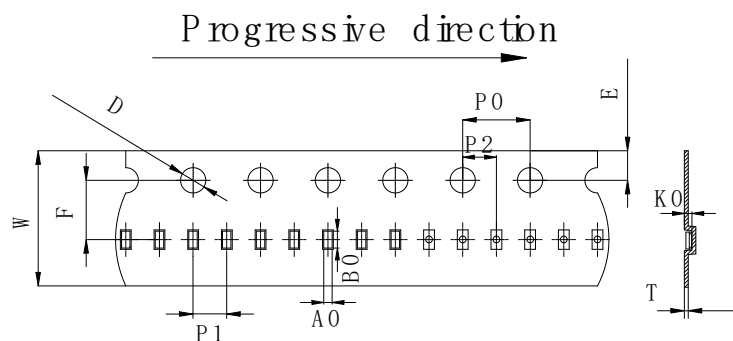

PACKAGE	W	E	F	P0	D	P2	P1	T	A0	B0	K0
DFN0603	8mm	1.75mm	3.5mm	4mm	1.5mm	2mm	2mm	0.23mm	0.34mm	0.67mm	0.4mm
	±0.1	±0.1	±0.05	±0.1	±0.1	±0.05	±0.1	±0.02	±0.05	±0.05	±0.05



- **History Version**

V1.0	Product datasheet	2021-03-30
V1.1	Add marking Icon	2022-04-27

DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.