



SSCT20V21L3

1-Line Uni-directional TVS Diode

● Description


The SSCT20V21L3 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. The SSCT20V21L3 complies with the IEC 61000-4-2 (ESD) with $\pm 30\text{kV}$ air and $\pm 30\text{kV}$ contact discharge. It is assembled into an ultra-small 1.6x1.0x0.5mm lead-free DFN package.

The small size and high ESD surge protection make SSCT20V21L3 an ideal choice to protect cell phone, digital cameras, audio players and many other portable applications.

● PIN configuration



DFN1610-2L



Circuit diagram

● Features

- ◇ 5000W peak pulse power ($t_p = 8/20\mu\text{s}$)
- ◇ DFN1610-2L Package
- ◇ Working voltage: 20V
- ◇ Low clamping voltage
- ◇ Low leakage current
- ◇ Small Body Outline Dimensions
- ◇ Response Time is Typically $< 1\text{ns}$
- ◇ RoHS compliant
- ◇ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC 61000-4-5 (Surge) 100A (8/20 μs)

● Applications

- ◇ Cellular Handsets and Accessories
- ◇ Personal Digital Assistants
- ◇ Notebooks and Handhelds
- ◇ Portable Instrumentation
- ◇ Digital Cameras
- ◇ Peripherals
- ◇ Audio Players
- ◇ Industrial Equipment


● Mechanical Characteristics

- ◇ Lead finish: 100% matte Sn(Tin)
- ◇ Mounting position: Any
- ◇ Qualified max reflow temperature: 260°C
- ◇ Device meets MSL 1 requirements
- ◇ Pure tin plating: 7 ~ 17 μm
- ◇ Pin flatness: $\leq 3\text{mil}$



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

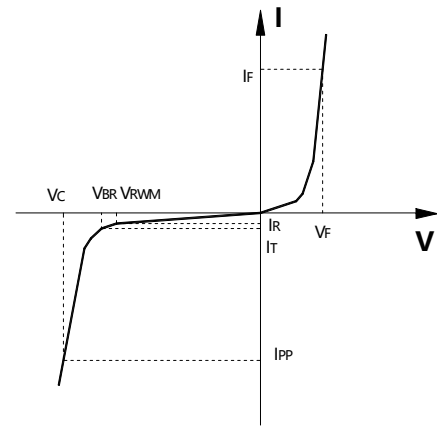

● Absolute maximum rating @TA=25°C

Parameter	Symbol	Value	Units
Peak Pulse Power (8/20us)	P_{PP}	5000	W
Peak Pulse Current (8/20us)	I_{PP}	100	A
ESD Rating per IEC61000-4-2:	Contact	±30	KV
	Air	±30	
Storage Temperature	T_{STG}	-55/+150	°C
Operating Temperature	T_J	-55/+125	°C



● Electrical Characteristics @TA=25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V_{RWM}				20	V
Breakdown Voltage	V_{BR}	$I_T = 1mA$	22			V
Reverse Leakage Current	I_R	$V_{RWM} = 20V$			1	μA
Clamping Voltage	V_C	$I_{PP} = 50A, t_p = 8/20\mu s$		26		V
Clamping Voltage	V_C	$I_{PP} = 100A, t_p = 8/20\mu s$		29	50	V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz,$		230		pF




SSCT20V21L3


● Typical Performance Characteristics(T_A=25°C unless otherwise Specified)

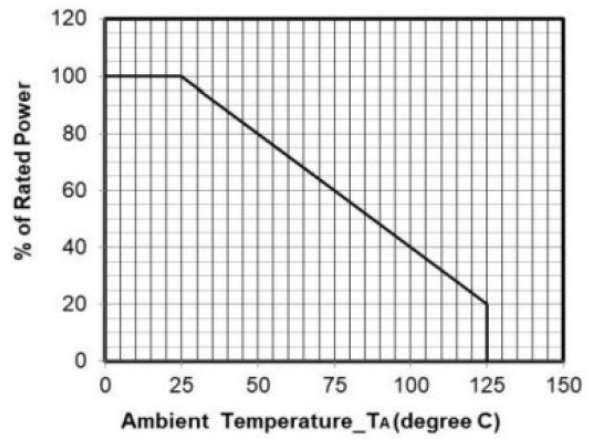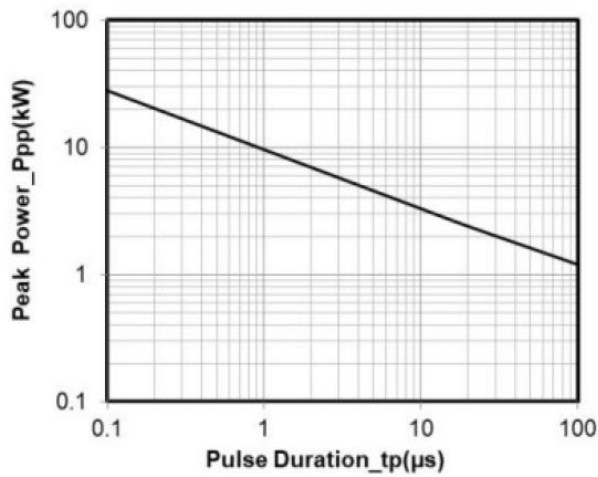

Power Derating Curve

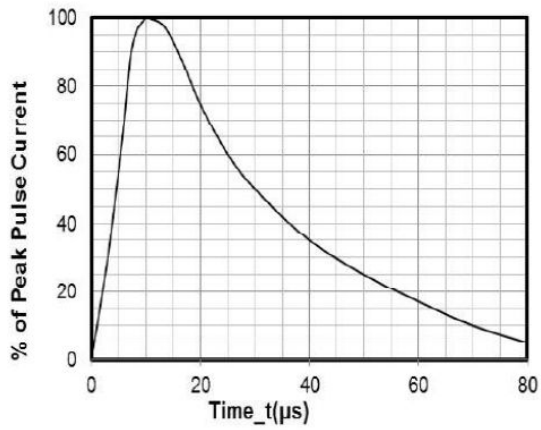

8 X 20μs Pulse Waveform

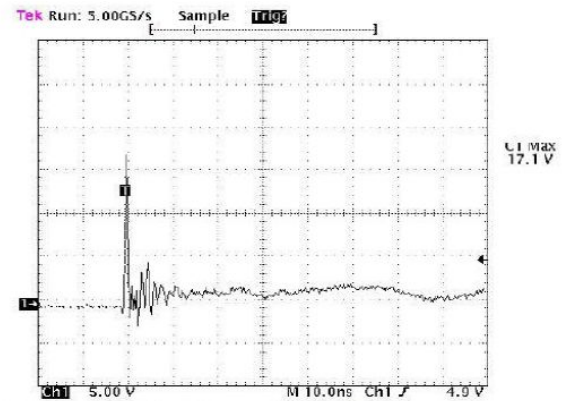

Note: Data is taken with a 10x attenuator

ESD Clamping Voltage

+8 kV Contact per IEC61000-4-2



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCT20V21L3	DFN1610-2L	3000	7 Inch

Mechanical Data


Case: DFN1610-2L

Case Material: Molded Plastic. UL Flammability

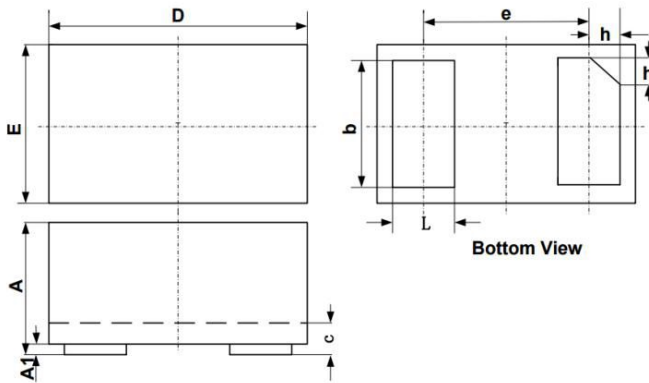

DIM	Millimeters		
	Min.	typ.	Max.
A	0.45	0.50	0.55
A1	0.00	0.02	0.05
b	0.75	0.80	0.85
c	0.10	0.15	0.20
D	1.55	1.60	1.65
e	1.10 BSC		
E	0.95	1.00	1.05
L	0.35	0.40	0.45
h	0.15	0.20	0.25

Recommended Pad outline(Unit:mm)

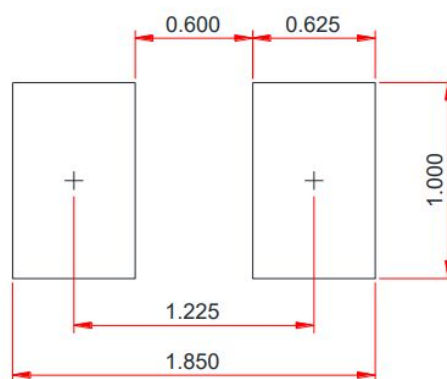



- **History Version**

V1.0	First edition	2021-12-13
------	---------------	------------

DISCLAIMER

AF SEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AF SEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.